



ESL 9-12

12V - 9 Ah

Electrical specifications

Nominal		12V - 9	Ah
Capacity 25°C @ 10,8V	20h	8,8	Ah
	10h	8,2	Ah
	8h	-	Ah
	3h	6,54	Ah
	1h	5,34	Ah
Self discharge @ 25°C	per month	3	%
Resistance _(Ohm)	fully charged	Approx. 19	mΩ
I _{max} Charge		2,7	A
I _{max} Discharge		135 (5 sec)	A
Charge Voltage @25°C	Standby	2,26 - 2,30	V/Cell
Charge Voltage @25°C	Cyclic	2,41 - 2,48	V/Cell


Other specifications

Design Life	5	Years
Dimensions L x W x H	151 x 65 x 94	mm
Total height	100	mm
Operating Temperature	-20 to +50	°C
Separator	Absorbant Glass Mat	
Grid alloy	Calcium / Tin lead alloy	
Case and cover	ABS	
Electrolyte	Sulphuric Acid	
Terminal / Length	T1/T2	faston
Optional terminal types	-	
Torque setting	-	Nm
Weight	2,60 (±5%)	Kg

Innovative Features

- Completely maintenance free, sealed construction eliminates the need for adding water
- Fully tank formed plates
- Analytical grade electrolyte
- Spill proof / leak proof
- Valve regulated Max internal pressure 2,5 psi
- Multi-position usage
- ABS Container
- Low self discharge
- FAA and IATA approved as non-hazardous
- Built to comply with IEC 8962, DIN 43534, BS 6290 Pt4, Eurobat

Dimensions

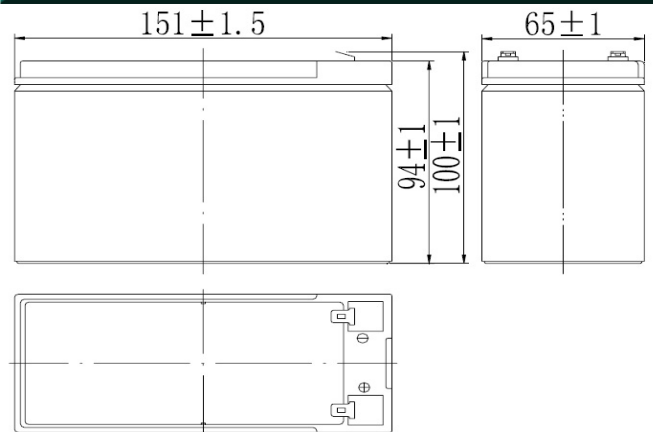

Constant Amps discharge - Amps at 25°C

V/Cell	5 min	10 min	15 min	30 min	60 min	2 hr	3 hr	4 hr	5 hr	10 hr	20 hr
1,80	28.7	18.1	14.7	8.52	5.34	3.02	2.18	1.75	1.48	0.82	0.44
1,75	30.4	19.2	15.5	8.84	5.50	3.10	2.25	1.80	1.53	0.84	0.45
1,70	31.8	20.1	16.1	9.06	5.62	3.15	2.27	1.81	1.54	0.84	0.45
1,65	33.2	21.0	16.7	9.35	5.76	3.18	2.28	1.83	1.55	0.85	0.45
1,60	34.2	21.6	17.1	9.54	5.85	3.20	2.30	1.84	1.56	0.85	0.46

Constant Power Discharge - Watts at 25°C

V/Cell	5 min	10 min	15 min	30 min	60 min	2 hr	3 hr	4 hr	5 hr	10 hr	20 hr
1,80	321	205	168	97.6	61.8	35.4	25.9	20.8	17.7	9.84	5.29
1,75	340	217	177	101	63.7	36.3	26.7	21.4	18.3	10.0	5.40
1,70	355	227	183	104	65.0	36.9	26.9	21.6	18.4	10.1	5.43
1,65	370	236	190	107	66.7	37.2	27.1	21.7	18.5	10.2	5.46
1,60	382	244	195	109	67.7	37.4	27.3	21.9	18.6	10.2	5.48

Version: 201412-1_K

Your Wing Dealer :

